Technical Specifications

HP E27 G4 FHD Monitor




Front

1. OSD Buttons

2. Power Button

Technical Specifications

HP E27 G4 FHD Monitor

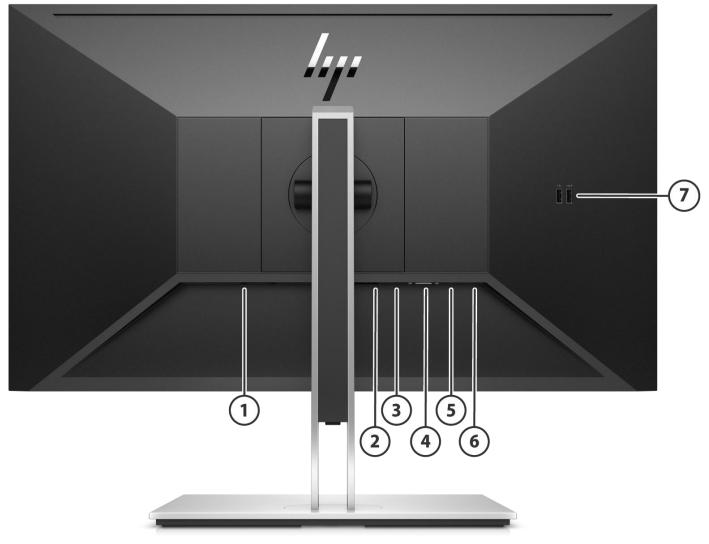

Back

- 1. **Power Connector** DisplayPort™ 1.2 2. 3.
- 4. **VGA Port**
- HDMI 1.4 Port

- **USB-B Port**
- 6. USB-A Ports (2)
- USB-A Ports (2)

Technical Specifications

Models: 9VG71AA

Panel Specifications Display Size (Diagonal) 27-in

Display Panel Type **IPS** Micro-Edge Bezel Yes, 3-sided **Native Resolution/Timing** 1920×1080 @ 60 Hz Panel Bit Depth

Aspect Ratio 16:9 **Brightness - Typical** 250 cd/m² Static Contrast Ratio - Typical 1000:1 Dynamic Contrast Ratio (DCR) 5.000,000:1

Flicker Free Yes

Pixel Pitch 0.3114(H)mm x 0.3114(V)mm

Pixels Per Inch (PPI)

Backlight Lamp Life (to half brightness -30k minimum

in hours)

Anti-Glare Panel Yes

Response Time - Typical 5ms GtG (with overdrive)

Horizontal Viewing Angle (typical CR>10) 178° Vertical Viewing Angle (typical CR>10) 178°

Panel Active Area (w x h) 597.89mm x336.31 mm **Preset Graphic Modes/Supported** 640 x 480 @ 60 Hz Resolutions 720 x 400 @ 70 Hz

800 x 600 @ 60 Hz 1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz 1366 x 768 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz

8bit (6bit + FRC)

1920 x 1080 @ 60 Hz **Maximum Resolution** 1920 x 1080 @ 60 Hz **Recommended Resolution** 1920 x 1080 @ 60 Hz Vertical Scan Range 50Hz - 60Hz

Horizontal Scan Range 30KHz - 80KHz **Default Color Temperature** Neutral (6500 K) **Maximum Pixel Clock Speed** 170 MHz

*VGA or DisplayPort™ 1.2 or HDMI 1.4 required to drive panel at its native resolution

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color Gamut Coverage

NTSC 72%

Color Management Color Space / Subsampling Support RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2

> **Default Color Temperature** Neutral (6500 K)

Low Blue Light Modes Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution

certified

RGB Channel Adjust Yes, Gain



Technical Specifica	ations	
Monitor Specifications	Exterior Color of Monitor Bezel and Stand	Black head, Silver stand
	Plug & Play	Yes
	Tilt	-5° to +23°
	Swivel	±45°
	Pivot	± 90°
	Height Adjustment Range	150 mm
	VESA Mounting	Yes
		Yes
	Security Lock Ready	
	Detachable Base	Yes
	Warranty	Based on region
On Screen Display (OSD)	On Screen Display User Controls	Brightness+, Color, Image ,Input, Power, Menu, Management, Information, Exit
(552)	User Programmable Modes	Yes, 10
	Monitor Control Buttons or Switches	Menu/OK, Minus ("-")/Brightness, Plus ("+")/Color ,
	riometric control pattons or switches	Back/Input, Power
	User-Assignable Function Buttons	Yes, 4
	Languages	10 (English, Spanish, German, French, Italian, Netherlands,
	Lunguages	Portuguese, Japanese, T-Chinese and S-Chinese)
Commenter Turner	Display DoubTM	1 DisplayDoutM 1 2
Connector Types	DisplayPort™	1, DisplayPort™ 1.2
	HDMI	1, HDMI1.4
	VGA	1
	USB-A	4
	USB-B	1
	HDCP support	Yes, (DisplayPort™ and HDMI)
Power & Operating	Power Supply	Internal
Specs	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption - Maximum	53 W
	Energy Saving/Standby Mode	0.5 W
	Power Consumption - Typical	22 W
	Power cable length	1.9 m
Energy Star Data	Operational Mode at 100 VAC	11.68 W
	Operational Mode at 115 VAC	11.64 W
	Operational Mode at 230 VAC	11.69 W
EU Energy Efficiency Class (EC1062)	On-mode Power Consumption (EC 1062/2010)	13 W
	Annual Power Consumption	19 kWh
	(EC 1062/2010)	
	Energy Efficiency Class (EC 1062/2010)	A++
Operating	Operating Tompovature Calains	E0 3E0C
Operating	Operating Temperature - Celsius	5°-35°C
Conditions	Operating Temperature - Fahrenheit	41°C -95°F
	Non-operating Temperature - Celsius	-34° - 60°C
	Non-operating Temperature - Fahrenheit	29° - 140°F
	Operating Humidity	20 – 80% Relative Humidity (non-condensing)

Non-operating Humidity 5-95%

Operating Altitude 0 - 5,000 m (16,400 ft.) Non-operating Altitude 0-12,192 m (40,000 ft.)

Mercury-free LED display backlighting Yes, Mercury-free LED backlighting

Technical Specifications

Environmental
Features and
Certifications

Arsenic-Free Display Glass Yes
Low Halogen** Yes

GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR,

PVC)

NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained

after purchase may not be Low Halogen.

Agency Approvals and Certifications CE,CB,KC/KCC/NOM/PSB/ICE/TUV-S/ISO 9241-307/

EAC/UL/CSA/PSB/ISC/CCC/CEL/Energy

Star/ISC/VCCI/FCC/BSMI/Vietnam MEPS/Australian-New

Zealand MEPS/WEEE

Microsoft WHQL CertificationWin 10, Win 8, Win 7ENERGY STAR®Yes, ENERGY STAR® 8

EPEAT® Registered* Yes

CEL Grade 1

TCO Certified Yes

SmartWay Transport Partnership - NA

(VESA®) in the United States and other countries.

only

* Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit

http://www.epeat.net for more information.

**External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after

purchase may not be Low Halogen.

Note: DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association

Yes (NA SKU)

Contains Recycled Plastics 85% recycled content by total weight

Unit Product/Package Specifications

Product Dimensions (Unpacked with stand) (W x D x H)	<u>Metric</u> 61.17 x 21.60 x 53.52 cm	<u>Imperial</u> 24.08 x 8.50 x 21.07 in
Product Dimensions (Packed) (W x D x H)	69.5 x 44.40 x 22.5 cm	27.36 x 17.48 x 8.86 in
Display Head Dimensions (Unpacked without stand) (W x D x H)	61.17 x 4.7 x 36.36 cm	24.08 x 1.85 x 14.31 in
Base Area Footprint	287.97 x 215.97 mm	11.34 x 88.50 in
(w x d mm) Bezel Measurements	Bottom 21.38 mm	Bottom 0.84 in
Product Weight (Unpacked with stand)	6.9 kg	15.12 lb
Product Weight (Packed)	10.8 kg	23.81 lb
Product Weight	4.3 kg	9.57 lb
(Head Only) Container Load, 40-Foot HighQ	900 units	

Software Included HP Display Center

What's in the box? AC Power Cord (1.8m) 5.9 ft, HDMI Cable (1.8m) 5.9 ft, DP Cable (1.8m) 5.9 ft, 1 USB-B to A Cable

User Guide and Warranty Languages **User Guide Languages**

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian

Technical Specifications

Warranty Languages

Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.



Technical Specifications

Copyright © 2021 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log					
January 3, 2021	V1 to V2	Techspecs Updated			

