

# MS660

Mariner Kit for use with HP ProCurve Switches  
I400-24G and I700-24



HP ProCurve Switches I400-24G and I700-24 are marine type-approved by all of the major international marine Classification Societies when installed in conjunction with our Mariner Kit MS660.

The MS660 Mariner Kit affords protection against the effects of vibration and shock experienced in the offshore marine environment and has been type-tested against IACS Unified Requirement E10 and the relevant sections of IEC60945 (see below right for test details).

This type-approved combination of hardware and Mariner Kit can be used as the platform for your critical navigation, control, loading and general purpose applications (please check individual type-approval certificates for any restrictions).

## WHAT IS SO SPECIAL ABOUT HP PROCURVE SWITCHES I400-24G AND I700-24?

- ◆ ProCurve Switch I400-24G is an unmanaged switch with 22 off 10/100/1000 ports plus 2 dual-personality ports
- ◆ ProCurve Switch I700-24 is a web-managed switch with 22 off 10/100 ports plus 2 dual-personality ports
- ◆ Silent operation via a fanless design
- ◆ Wire-speed performance maximises throughput for all PCs and servers (I400-24G)
- ◆ ProCurve/IEEE Auto-MDIX: automatically adjusts for straight-through or crossover cables on all 10/100/1000 ports
- ◆ 10/100/1000 auto-sensing per port: automatically detects and sets the speed for any 10Base-T or 100Base-TX, or 1000Base-T device (I400-24G)
- ◆ Comprehensive LED display with per-port indicators: provides an at-a-glance view of status, activity, speed, and full-duplex operation
- ◆ HP lifetime warranty: for as long as you own the product, with next business day advance replacement (available in most countries)

Every Mariner system is type-tested against the consolidated, 'worst-case' requirements of all the major international marine Classification Societies:

**ABS, BV, CCS, DNV, GL, KR, LR, NKK, PRS, RINA**

Type-tests included on the test programme are as follows:



- > Vibration, Shock, Static and Dynamic Inclination
- > Dry & Damp Heat, Low Temperature
- > Acoustic Noise, Compass Safe Distance
- > High Voltage, Power Supply Variation & Power Supply Failure
- > Conducted LF & RF, Electromagnetic Field
- > Radiated & Conducted Emissions, Electrostatic Discharge
- > Insulation Resistance, Burst / Fast Transients
- > Surge Immunity, Access to Dangerous Voltages

**“Steer the right course  
with Mariner Systems”**



# MS660

Mariner Kit for use with HP ProCurve Switches  
I400-24G and I700-24

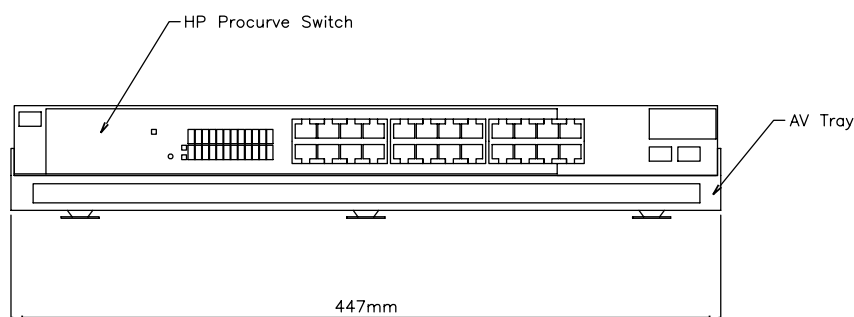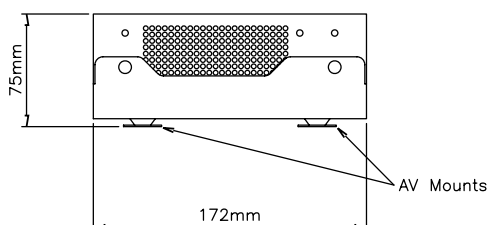

## OPERATING GUIDELINES

Although all our equipment is tested against extreme environmental conditions for the purposes of marine type-approval, installation should take into account the following guidelines:

- > Keep the switch away from excessive moisture, direct moisture and the extremes of heat and cold to ensure, where possible, that the unit is within the following operating/non-operating ranges:

	Operating	Non-Operating
<b>Temperature</b>	+0° to +40°C (+32° to +104°F)	-40° to +70°C (-40° to +158°F)
<b>Humidity</b>	15% to 95% at 40°C (104°F), non-condensing	10% to 90% at 65°C (149°F), non-condensing

- > Leave clearance on all vented sides of the switch to permit the required airflow
- > Never restrict airflow into the switch by blocking any vents or air intakes
- > If the switch is to be operated within a separate enclosure, suitable ventilation should be provided

By following these guidelines you will maximise the life of your equipment and minimise service costs.

## STATISTICS

<b>Overall Fitted Dimensions</b>	447mm (w) x 75mm (h) x 172mm (d)
<b>Weight (Mariner Kit only)</b>	Approx 0.9 Kg
<b>Weight (including hardware)</b>	Approx 2.6 Kg
<b>Ports</b>	<p><b>I400-24G:</b> 22 auto-sensing 10/100/1000 ports (IEEE 802.3 Type 10Base-T; IEEE 802.3u Type 100Base-TX; IEEE 802.3ab 1000Base-T); Media Type: IEEE Auto-MDIX; Duplex: 10Base-T/100Base-TX: half or full; 1000Base-T: full only 2 dual-personality ports; each port can be used as either an RJ-45 10/100/1000 port (IEEE 802.3 Type 10Base-T; IEEE 802.3u Type 100Base-TX; IEEE 802.3ab 1000Base-T Gigabit Ethernet) or an open mini-GBIC slot (for use with mini-GBIC transceivers)</p> <p><b>I700-24:</b> 22 auto-sensing 10/100 ports (IEEE 802.3 Type 10Base-T; IEEE 802.3u Type 100Base-TX); Media Type: Auto-MDIX; Duplex: half or full 2 dual-personality ports; each port can be used as either an RJ-45 10/100/1000 port (IEEE 802.3 Type 10Base-T; IEEE 802.3u Type 100Base-TX; IEEE 802.3ab 1000Base-T Gigabit Ethernet) or an open mini-GBIC slot (for use with mini-GBIC transceivers)</p>
<b>Latency</b>	I400-24G & I700-24: 100MB <4.7 µs; 1000MB <3.0 µs (64-byte packets)
<b>Throughput</b>	I400-24G: up to 35.7 million pps I700-24: up to 6.2 million pps (64-byte packets)
<b>Switching capacity</b>	I400-24G: 48 Gbps I700-24: 8.4 Gbps
<b>MAC address table size</b>	I400-24G & I700-24: 8,000 entries
<b>Max heat dissipation</b>	I400-24G: 81 BTU/hr (85.46 kJ/hr) I700-24: 82 BTU/hr (86.51 kJ/hr)
<b>AC Voltage</b>	I400-24G & I700-24: 100-127 / 200-240 VAC
<b>Power</b>	I400-24G & I700-24: 24 W
<b>Current</b>	I400-24G & I700-24: 0.75 / 0.4 A
<b>Frequency</b>	I400-24G & I700-24: 50 / 60 Hz



Mariner Systems (UK) Limited

Oaklands Park • Wokingham • Berkshire • RG41 2FD • United Kingdom  
Telephone: +44 (0) 118 979 6020 • Facsimile: +44 (0) 118 979 6021  
sales@marinersystems.com • www.marinersystems.com

Design and specifications are subject to change without notice. E&OE.